


JSK屏蔽接线端子

JSK 8 JSK 14 JSK 20 JSK 35




JSK8 JSK14 JSK20 JSK35

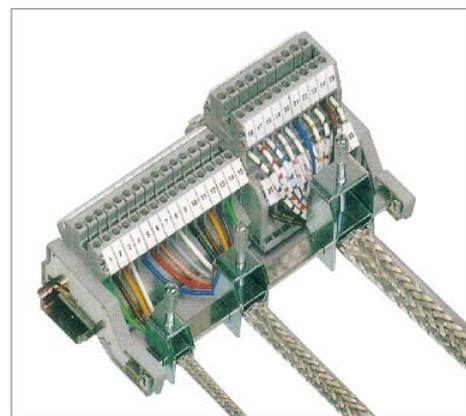

屏蔽耦合阻抗

屏蔽接线端子不可用作导线抗拉扯装置。

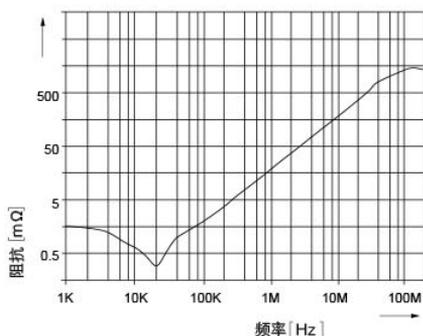

说明


屏蔽接线端子：用于汇流条上夹紧电缆的屏蔽层

(1) 屏蔽支架：可安装于C型导轨上适用于10 x 3mm的汇流条

(2) N-汇流条：10 x 3mm，长1m由铜制成，镀锡

(3) 屏蔽底座：由绝缘材料制成，带固定螺钉；可用于10 x 3mm或6 x 6mm的汇流条

型号	订货号	接线数据	件数 包装单位
JSK 8	1015.049	Φ8mm	10
JSK 14	1015.050	Φ14mm	10
JSK 20	1015.051	Φ20mm	10
JSK 35	1015.052	Φ35mm	10
JAB-SK	1015.053		10
NLS-CU 3/10	1015.027	I_{max} : 140A	10
AB/SS AB/2SS	1015.025 1015.026		10

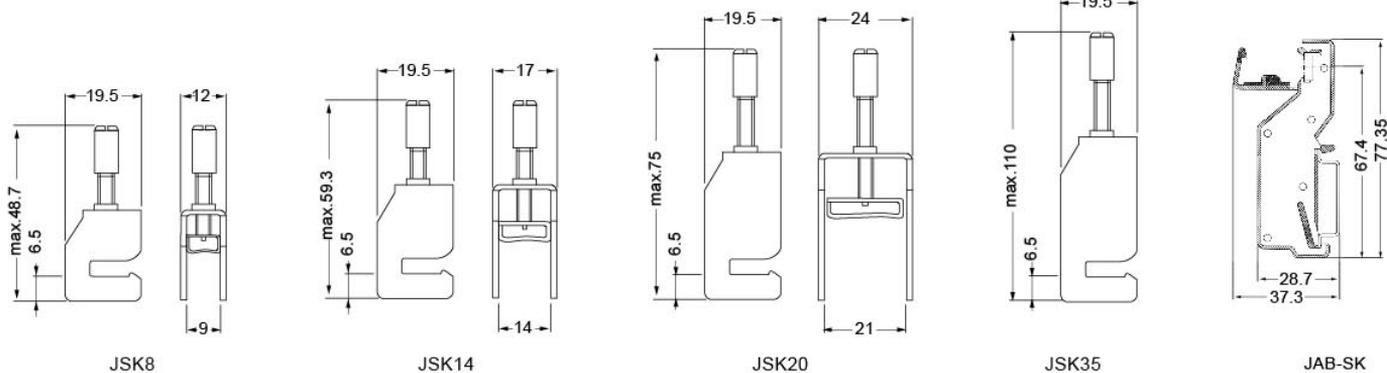


接线端子

LP769V-5.0



CE

型号	订货号	包装
LP769V-5.0-04P	7052 001	25
LP769V-5.0-05P	7052 002	
LP769V-5.0-06P	7052 003	
LP769V-5.0-09P	7052 004	
LP769V-5.0-12P	7052 005	
LP769V-5.0-16P	7052 006	

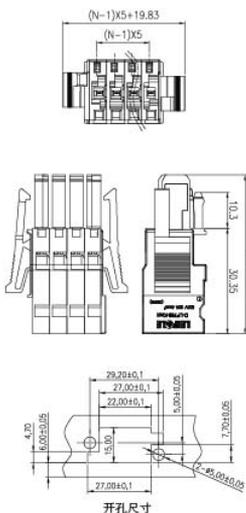

LP769M-5.0



CE

型号	订货号	包装
LP769M-5.0-04P	7052 010	25
LP769M-5.0-05P	7052 011	
LP769M-5.0-06P	7052 012	
LP769M-5.0-09P	7052 013	
LP769M-5.0-12P	7052 014	
LP769M-5.0-16P	7052 015	

